


LO PP40-G2

Caption

UL	peel off the ultra-linear	sizes	overall dimensions
R_{aa}	resistance of the anode-anode	f_{min}	minimum frequency
P_{max}	maximum power	I_{max}	maximum current
L_{aa}	inductance of the anode-anode, $f=120\text{Hz}$	R_o	load resistance
$k_{n:n}$	transmission	price	price
f_{max}	maximum frequency	core	core type
weight	approximate weight	Z_{aa}	anode-anode impedance

Specyfikacje

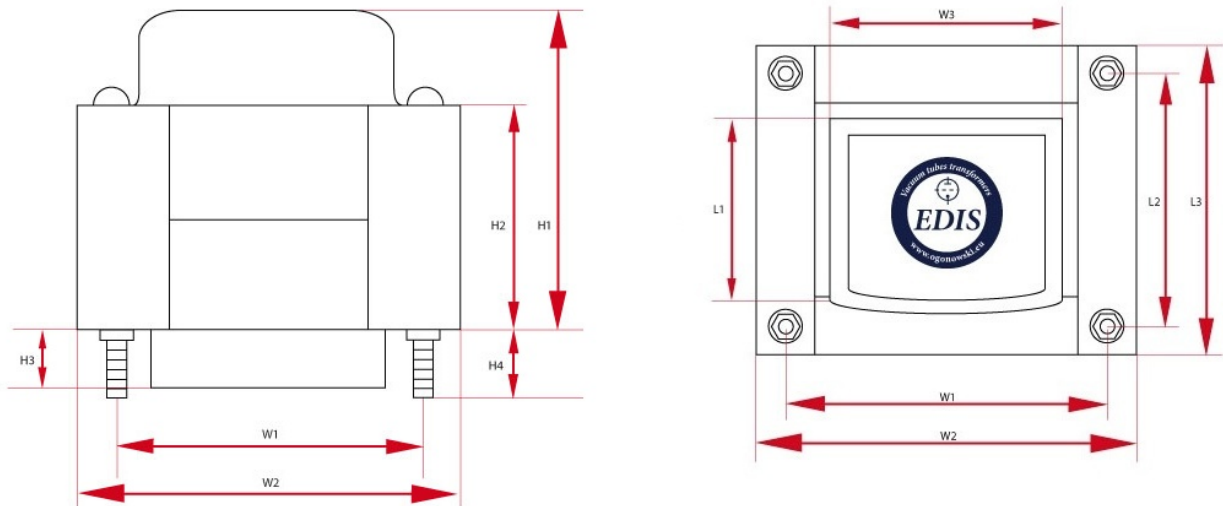

Push Pull - PP40-G2 - wersja z jednym dekielkiem							
P_{max}	Z_a	I_{max}	R_{aa}	UL	$k_{n:n}$	R_o	L_a
40 W	8 Ω	200 mA	8000 Ω	-	-	4 and 8 and 16 Ω	-
f_{min}	f_{max}	Core	Size W	Size H	Size L	Weight	Count
		EI66/32	W1 -- mm W2 -- mm W3 -- mm	H1 -- mm H2 -- mm	L1 -- mm L2 -- mm L3 -- mm L4 -- mm	1 kg	1