


LO PP40-G2

Caption

UL	peel off the ultra-linear	R_o	load resistance
f_{\max}	maximum frequency	$k_{n:n}$	transmission
I_{\max}	maximum current	L_{aa}	inductance of the anode-anode, $f=120\text{Hz}$
core	core type	weight	approximate weight
f_{\min}	minimum frequency	sizes	overall dimensions
price	price	Z_{aa}	anode-anode impedance
R_{aa}	resistance of the anode-anode	P_{\max}	maximum power

Specyfikacje

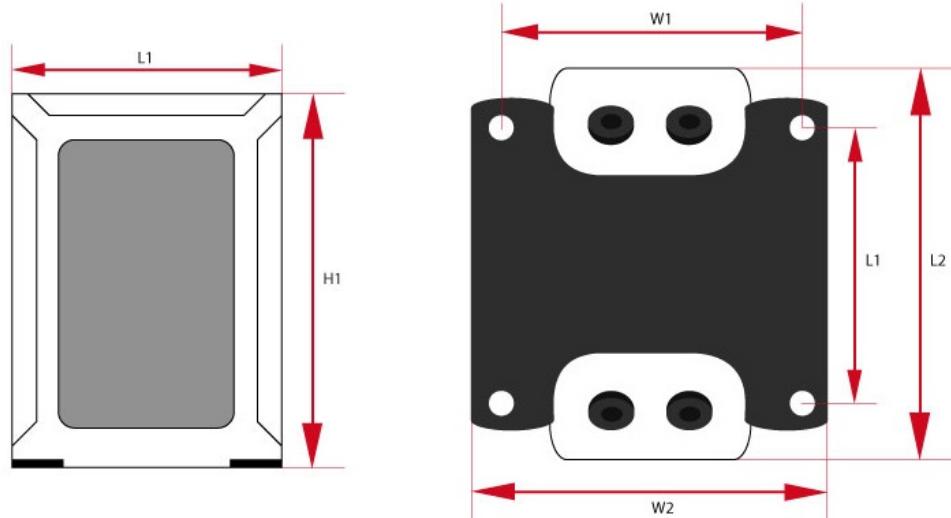

Push Pull - PP40-G2 - wersja z dwoma deklami

P_{\max}	Z_a	I_{\max}	R_{aa}	UL	$k_{n:n}$	R_o	L_a
40 W	8Ω	200 mA	8000Ω	-	-	4 and 8 and 16 Ω	-
f_{\min}	f_{\max}	Core	Size W	Size H	Size L	Weight	Count
		EI66/32	W1 -- mm W2 -- mm W3 -- mm	H1 -- mm H2 -- mm	L1 -- mm L2 -- mm L3 -- mm L4 -- mm	1 kG	1