


LO PP40-1

The transformer is made on the annealed cores, thickness of laminations 0.3 mm .

Caption

P_{max}	maximum power	sizes	overall dimensions
Z_{aa}	anode-anode impedance	f_{min}	minimum frequency
price	price	UL	peel off the ultra-linear
I_{max}	maximum current	core	core type
R_o	load resistance	R_{aa}	resistance of the anode-anode
$k_{n:n}$	transmission	L_{aa}	inductance of the anode-anode, f=120Hz
f_{max}	maximum frequency	weight	approximate weight

Specyfikacje

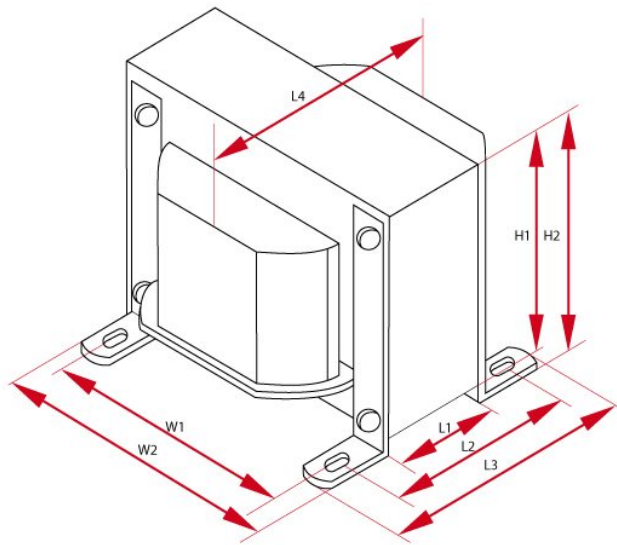

Push Pull - LO PP40-1							
P_{max}	Z_a	I_{max}	R_{aa}	UL	$k_{n:n}$	R_o	L_a
40 W	6600 Ω	200 mA	173 Ω	43 %	40.6 : 1, 28.7 : 1	4 and 8 Ω	44 H
f_{min}	f_{max}	Core	Size W	Size H	Size L	Weight	Count
15Hz @ -3dB	68kHz @ -3dB	EI84/42	W1 - 70 mm W2 - 84 mm W3 - 110 mm	H1 - 70 mm H2 - 74 mm	L1 - 42 mm L2 - 60 mm L3 - 72 mm L4 - 82 mm	1.8 kG	1
Price							
1-5 units		5+ units		10+ units		25+ units	
109.0 USD		104.0 USD		98.0 USD		93.0 USD	