


LO PP80-3

The transformer is made on the annealed cores, thickness of laminations 0.3 mm .

Caption

$k_{n,n}$	transmission	$P_{max}$	maximum power
price	price	sizes	overall dimensions
weight	approximate weight	core	core type
$R_{aa}$	resistance of the anode-anode	$R_o$	load resistance
UL	peel off the ultra-linear	$Z_{aa}$	anode-anode impedance
$f_{min}$	minimum frequency	$f_{max}$	maximum frequency
$L_{aa}$	inductance of the anode-anode, $f=120\text{Hz}$	$I_{max}$	maximum current

Specyfikacje

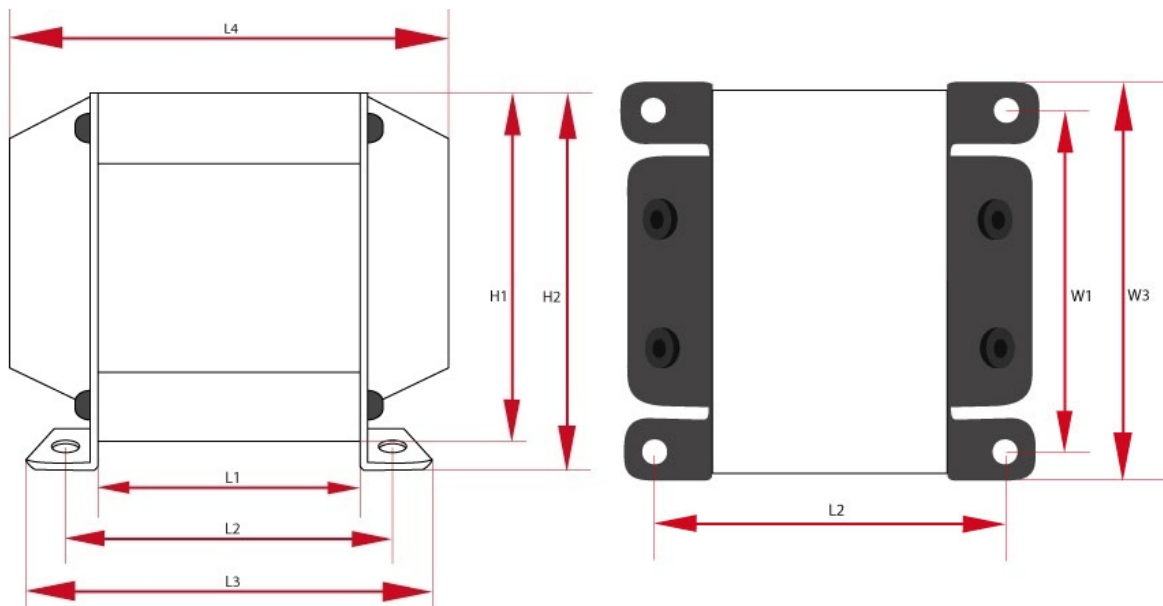

Push Pull - PP80-3 - wersja z dwoma deklami (PL)							
$P_{max}$	$Z_a$	$I_{max}$	$R_{aa}$	UL	$k_{n,n}$	$R_o$	$L_a$
80 W	1200 $\Omega$	500 mA	47 $\Omega$	-	17 : 1, 12 : 1	4 and 8 $\Omega$	21 H
$f_{min}$	$f_{max}$	Core	Size W	Size H	Size L	Weight	Count
8Hz @ -3dB 15Hz @ +/-1dB	66kHz @ -3dB 47kHz @ +/-1dB	EI96/59	W1 -- mm W2 -- mm W3 -- mm	H1 -- mm H2 -- mm	L1 -- mm L2 -- mm L3 -- mm L4 -- mm	3,5 kG	1
Price							
1-5 units		5+ units		10+ units		25+ units	
121.0 USD		115.0 USD		109.0 USD		103.0 USD	



Push Pull - PP80-3 - wersja z dwoma deklami (DE)

$P_{max}$	$Z_a$	$I_{max}$	$R_{aa}$	UL	$k_{n:n}$	$R_o$	$L_a$
80 W	1200 $\Omega$	500 mA	47 $\Omega$	-	17 : 1, 12 : 1	4 and 8 $\Omega$	21 H
$f_{min}$	$f_{max}$	Core	Size W	Size H	Size L	Weight	Count
8Hz @ -3dB 15Hz @ +/-1dB	66kHz @ -3dB 47kHz @ +/-1dB	E196/59	W1 -- mm W2 -- mm W3 -- mm	H1 -- mm H2 -- mm	L1 -- mm L2 -- mm L3 -- mm L4 -- mm	3,5 kg	1
Price							
1-5 units		5+ units		10+ units		25+ units	
121.0 USD		115.0 USD		109.0 USD		103.0 USD	