


300B SE

Idel chance to set-based SE amplifier 300B with stabilized lamp filament, and the rectifier tube (eg 5u4gb).


Caption

price	price	sizes	overall dimensions
I _{max}	maximum current	core	core type
P _{max}	maximum power	core	core type
R _a	anode resistance	sizes	overall dimensions
U _{we}	input voltage	UL	peel off the ultra-linear
weight	approximate weight	f _{zas}	operating frequency
Imax	maximum current	k _{n.n}	transmission
price	price	price	price
U _{n/In}	output voltage for current	R _o	load resistance
core	core type	f _{max}	maximum frequency
L _a	anode inductance, f = 120Hz	R	resistance
sizes	overall dimensions	weight	approximate weight
P _{max}	maximum power	weight	approximate weight
f _{min}	minimum frequency	Z _a	Anode impedance
L	inductance, f = 120Hz		

Specyfikacje

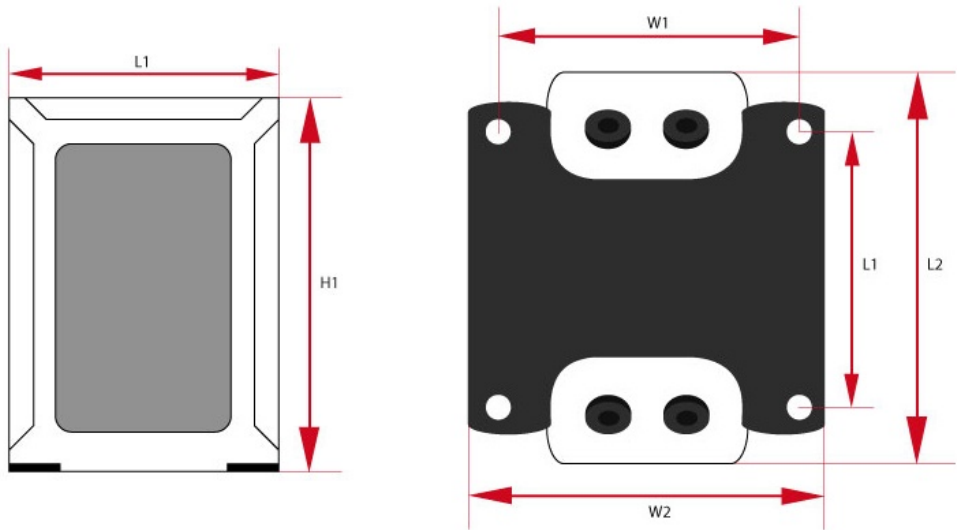

Power Transformer - TS120-5/10 - wersja z dwoma deklami (PL)							
P _{max}	U _{in}	F _z	Core	Size W	Size H	Size L	Weight
120 W	230 V	50 Hz	EI96/35	W1 - 110 mm W2 - 110 mm W3 - 110 mm	H1 - 110 mm H2 - 110 mm	L1 - 110 mm L2 - 110 mm L3 - 110 mm L4 - 110 mm	3.5 kg

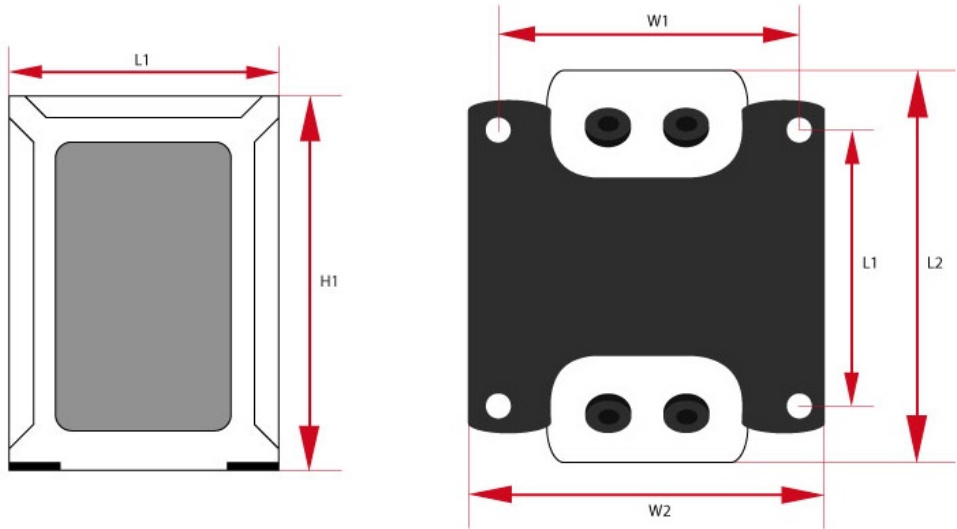

Choke - D8-1 - wersja z dwoma deklami

L	R	I _{max}	Core	Size W	Size H	Size L	Weight	Count
8 H	80 Ω	0.15mA mA	EI66/32	W1 - 110 mm W2 - 110 mm W3 - 110 mm	H1 - 110 mm H2 - 110 mm	L1 - 110 mm L2 - 110 mm L3 - 110 mm L4 - 110 mm	1.2 kG	2