


## 300B SE

Idel chance to set-based SE amplifier 300B with stabilized lamp filament, and the rectifier tube (eg 5u4gb).

## Caption

weight	approximate weight	$Z_a$	Anode impedance
$f_{max}$	maximum frequency	$I_{max}$	maximum current
price	price	price	price
$I_{max}$	maximum current	core	core type
$P_{max}$	maximum power	$R_a$	anode resistance
sizes	overall dimensions	R	resistance
$U_{we}$	input voltage	weight	approximate weight
UL	peel off the ultra-linear	weight	approximate weight
$f_{zas}$	operating frequency	$k_{n,n}$	transmission
price	price	L	inductance, $f = 120\text{Hz}$
sizes	overall dimensions	$U_{n/I_n}$	output voltage for current
$P_{max}$	maximum power	$R_o$	load resistance
core	core type	$L_a$	anode inductance, $f = 120\text{Hz}$
sizes	overall dimensions	core	core type
$f_{min}$	minimum frequency		

## Specyfikacje

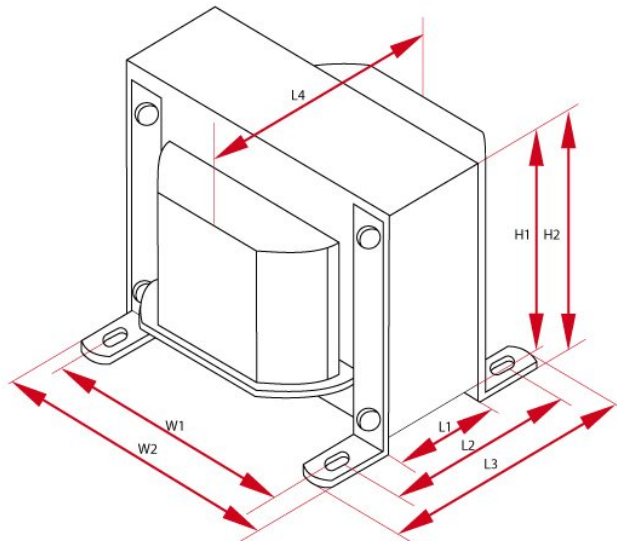

### Choke - D8-1

L	R	$I_{max}$	Core	Size W	Size H	Size L	Weight	Count
8 H	80 $\Omega$	0.15mA mA	EI66/32	W1 - 90 mm W2 - 90 mm W3 - 110 mm	H1 - 90 mm H2 - 90 mm	L1 - 90 mm L2 - 90 mm L3 - 90 mm L4 - - mm	1.2 kG	2

