


300B SE

Idel chance to set-based SE amplifier 300B with stabilized lamp filament, and the rectifier tube (eg 5u4gb).

Caption

weight	approximate weight	L_a	anode inductance, $f = 120\text{Hz}$
I_{max}	maximum current	weight	approximate weight
f_{zas}	operating frequency	Z_a	Anode impedance
$k_{n:n}$	transmission	U_{we}	input voltage
f_{max}	maximum frequency	sizes	overall dimensions
core	core type	P_{max}	maximum power
sizes	overall dimensions	core	core type
P_{max}	maximum power	weight	approximate weight
f_{min}	minimum frequency	sizes	overall dimensions
price	price	core	core type
UL	peel off the ultra-linear	R_a	anode resistance
price	price	price	price
L	inductance, $f = 120\text{Hz}$	R	resistance
U_{n/I_n}	output voltage for current	R_o	load resistance
I_{max}	maximum current		

Specyfikacje

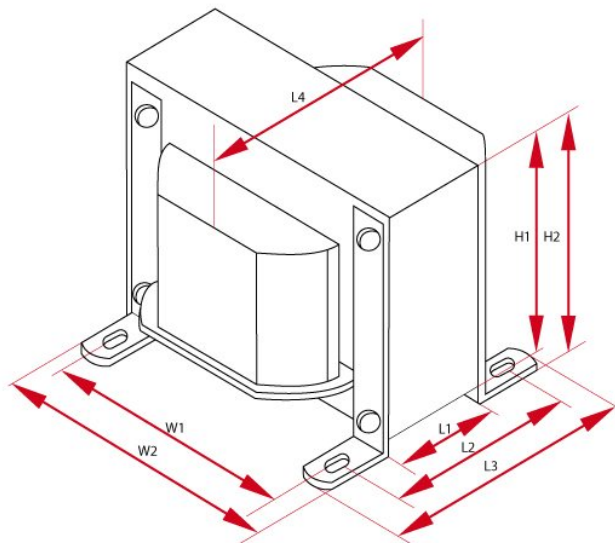

Choke - D8-1

L	R	I_{max}	Core	Size W	Size H	Size L	Weight	Count
8 H	80 Ω	0.15mA mA	EI66/32	W1 - 90 mm W2 - 90 mm W3 - 110 mm	H1 - 90 mm H2 - 90 mm	L1 - 90 mm L2 - 90 mm L3 - 90 mm L4 - - mm	1.2 kG	2

