


## LO SE50-1

The transformer is made on the annealed cores , thickness of laminations 0.23 mm . Fits to the transformer cover OT-12,5 (12,5x12,5x12cm accessories section). Transformer wound on a core CC, ideal for the construction of the amplifier to the wonderful both sonically and visually lamp 6C33C-b.

## Caption

$f_{max}$	maximum frequency	$R_o$	load resistance
$I_{max}$	maximum current	$Z_a$	Anode impedance
UL	peel off the ultra-linear	$f_{min}$	minimum frequency
$P_{max}$	maximum power	$R_a$	anode resistance
$k_{n:n}$	transmission	$L_a$	anode inductance, $f = 120\text{Hz}$
core	core type	weight	approximate weight
price	price	sizes	overall dimensions

## Specyfikacje

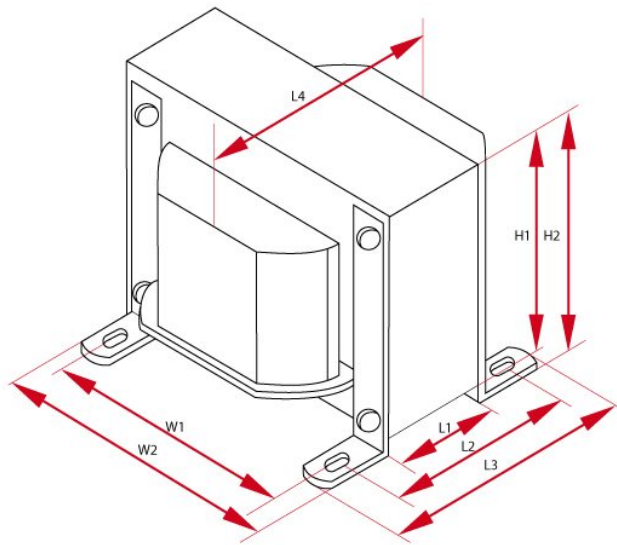

Single Ended - LO SE50-1							
$P_{max}$	$Z_a$	$I_{max}$	$R_a$	UL	$k_{n:n}$	$R_o$	$L_a$
50 W	600 $\Omega$	500 mA	42 $\Omega$	-	12:1 , 8:1	4 and 8 $\Omega$	9 H
$f_{min}$	$f_{max}$	Core	Size W	Size H	Size L	Weight	Count
10Hz @ -3dB 20Hz @ +/-1dB	60kHz @ -3dB 20kHz @ +/-1dB	CC	W1 - 90 mm W2 - 118 mm W3 - - mm	H1 - 104 mm H2 - 118 mm	L1 - 40 mm L2 - 75 mm L3 - 93 mm L4 - 88 mm	3.5 kG	1
Price							
1-5 units		5+ units		10+ units		25+ units	
167.0 USD		158.0 USD		150.0 USD		142.0 USD	