


LO D20-1

Core Ei84/42, usually laminations thick 0,5mm. Choke can be made on the annealed laminations thick of 0.3 mm for an additional charge 16USD. Fits to the choke, cover OT-10 (dimensions 10x10x9cm - accessories section).

Caption



| | | | |
|--------|-----------------------|-------|--------------------|
| R | resistance | price | price |
| L | inductance, f = 120Hz | Imax | maximum current |
| core | core type | sizes | overall dimensions |
| weight | approximate weight | | |

Specyfikacje

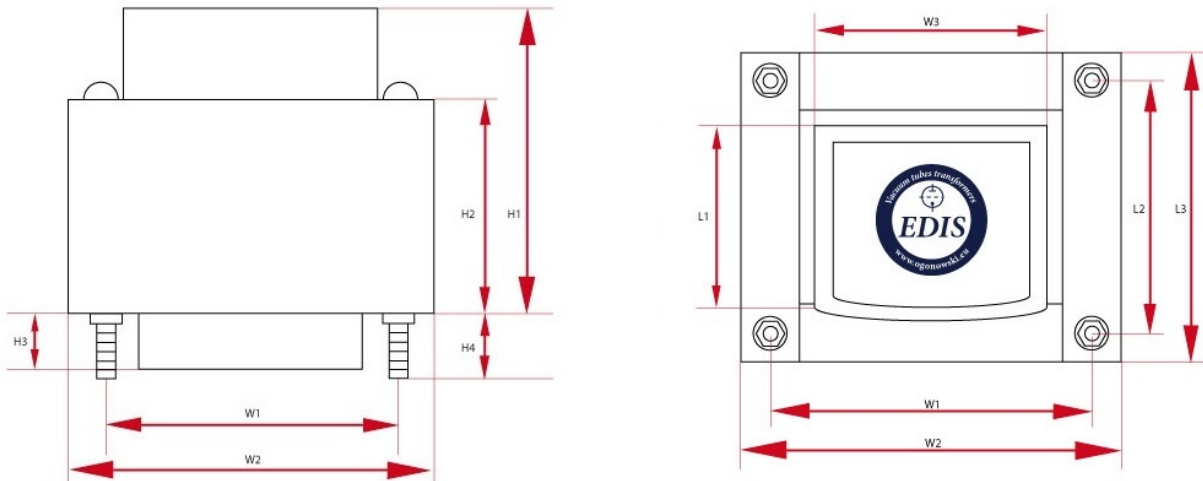

Choke - LO D20-1 - wersja z jednym dekielkiem (PL)

| L | R | I _{max} | Core | Size W | Size H | Size L | Weight | Count |
|------|-------|------------------|---------|---|----------------------------|--|--------|-------|
| 20 H | 140 Ω | 200 mA | Ei84/42 | W1 - 110 mm W2 - 110 mm W3 - 110 mm | H1 - 110 mm H2 - 110 mm | L1 - 110 mm L2 - 110 mm L3 - 110 mm L4 - 110 mm | 1.9 kG | 1 |

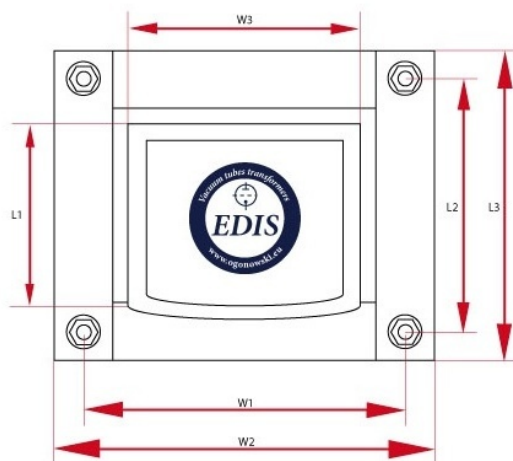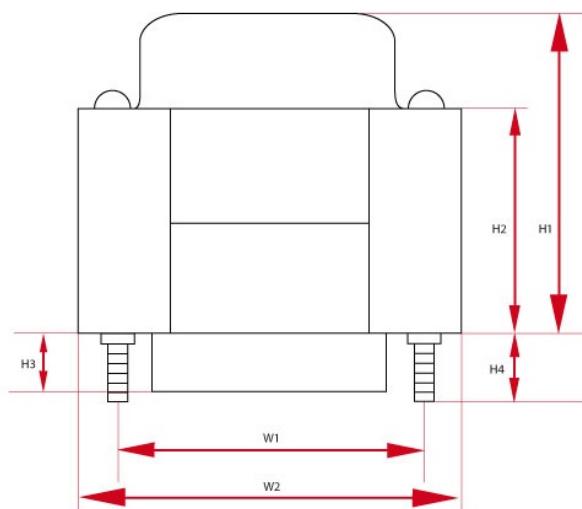

Choke - LO D20-1 - wersja z jednym dekielkiem (DE)

| L | R | I_{\max} | Core | Size W | Size H | Size L | Weight | Count |
|------|--------------|------------|---------|---|----------------------------|--|--------|-------|
| 20 H | 140 Ω | 200 mA | EI84/42 | W1 - 110 mm W2 - 110 mm W3 - 110 mm | H1 - 110 mm H2 - 110 mm | L1 - 110 mm L2 - 110 mm L3 - 110 mm L4 - 110 mm | 1.9 kG | 1 |