


TS80-2


Caption

| | | | |
|------------|----------------------------|-----------|--------------------|
| U_{we} | input voltage | weight | approximate weight |
| price | price | P_{max} | maximum power |
| $U_{n/In}$ | output voltage for current | sizes | overall dimensions |
| f_{zas} | operating frequency | core | core type |

Specyfikacje

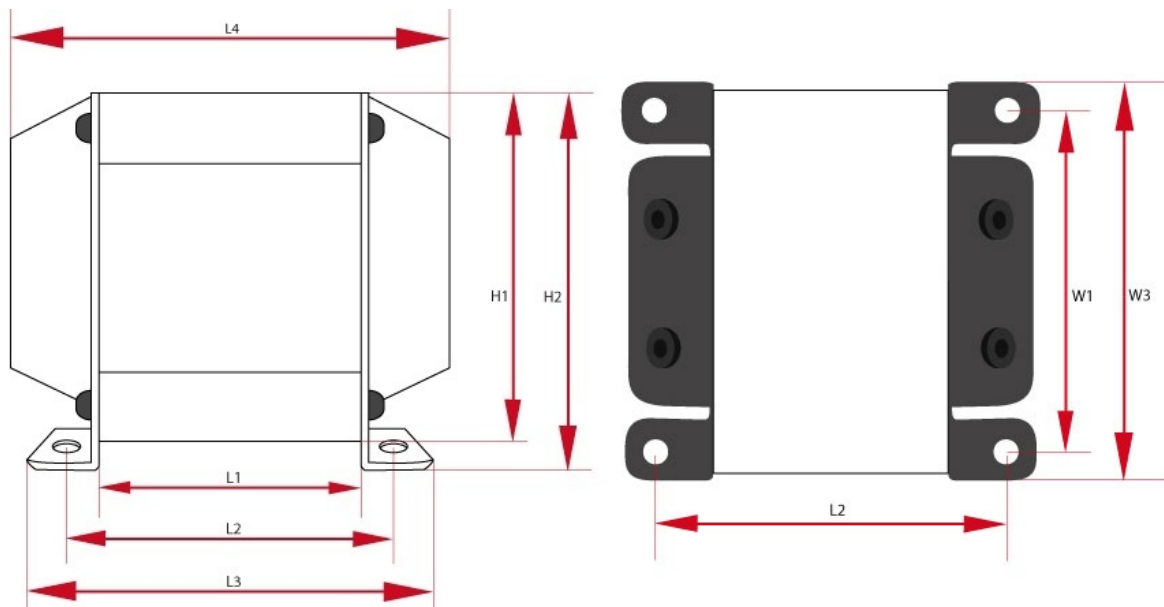

| Power Transformer - TS80-2 - wersja z dwoma deklami (PL) | | | | | | | |
|--|----------|----------|----------|---|----------------------------|--|----------|
| P_{max} | U_{in} | F_z | Core | Size W | Size H | Size L | Weight |
| 80 W | 230 V | 50 Hz | EI84/48 | W1 - 110 mm W2 - 110 mm W3 - 110 mm | H1 - 110 mm H2 - 110 mm | L1 - 110 mm L2 - 110 mm L3 - 110 mm L4 - 110 mm | 2 kg |
| U_{a1} | U_{a2} | U_{a3} | U_{a4} | U_{a5} | U_{a6} | U_{a7} | U_{a8} |
| 250V/200mA | 6,3V/2A | - | - | - | - | - | - |
| Oslona | Count | | | | | | |
| OT10 | 1 | | | | | | |

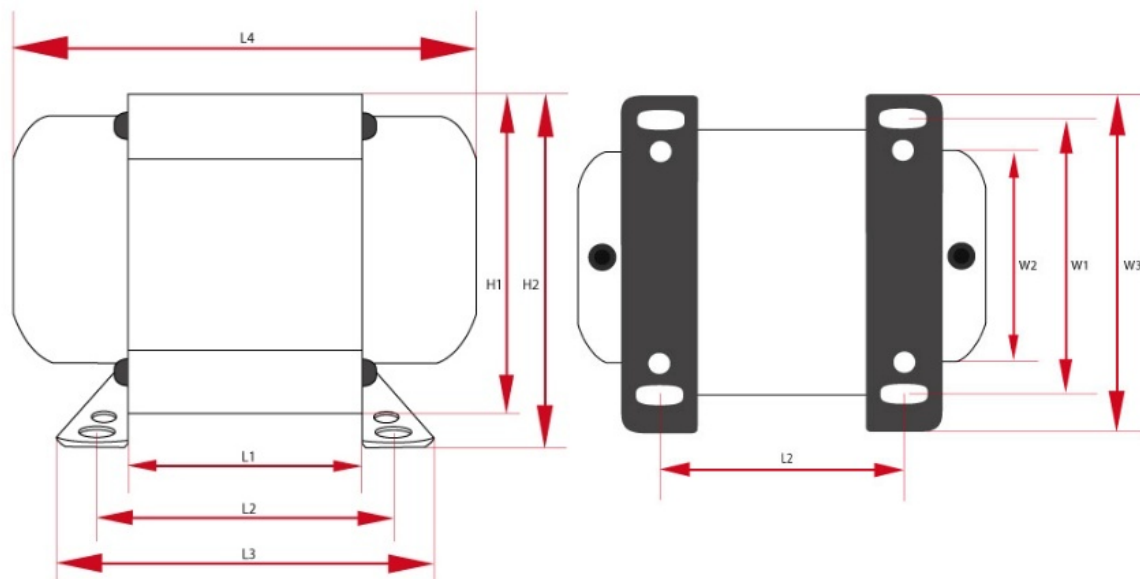

Power Transformer - TS80-2 - wersja z dwoma deklami (DE)

| P_{max} | U_{in} | F_z | Core | Size W | Size H | Size L | Weight |
|------------|----------|----------|----------|---|----------------------------|--|----------|
| 80 W | 230 V | 50 Hz | EI84/48 | W1 - 110 mm W2 - 110 mm W3 - 110 mm | H1 - 110 mm H2 - 110 mm | L1 - 110 mm L2 - 110 mm L3 - 110 mm L4 - 110 mm | 2 kg |
| U_{a1} | U_{a2} | U_{a3} | U_{a4} | U_{a5} | U_{a6} | U_{a7} | U_{a8} |
| 250V/200mA | 6,3V/2A | - | - | - | - | - | - |
| Ostona | Count | | | | | | |
| OT10 | 1 | | | | | | |