


## LO PP40-2

The transformer is made on the annealed cores, thickness of laminations 0.3 mm. Fits to the transformer, cover OT-10 (dimensions 10x10x10cm - accessories section).

## Caption

price	price	$P_{max}$	maximum power
sizes	overall dimensions	UL	peel off the ultra-linear
$R_o$	load resistance	$f_{min}$	minimum frequency
$I_{max}$	maximum current	core	core type
$L_{aa}$	inductance of the anode-anode, $f=120\text{Hz}$	$f_{max}$	maximum frequency
weight	approximate weight	$k_{n.n}$	transmission
$Z_{aa}$	anode-anode impedance	$R_{aa}$	resistance of the anode-anode

## Specyfikacje

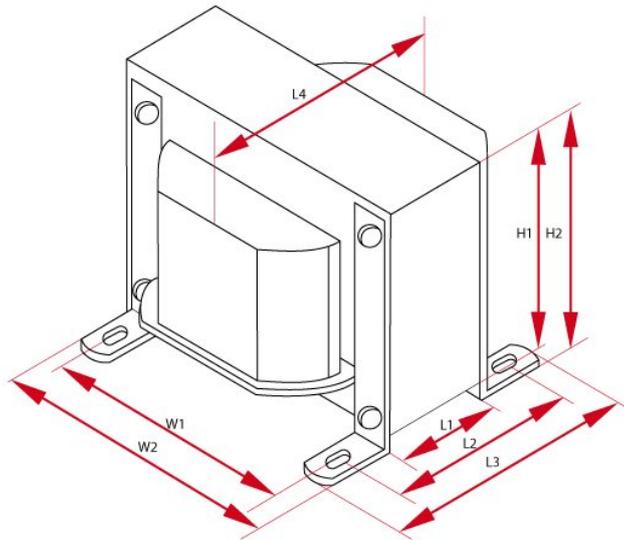

Push Pull - LO PP40-2							
$P_{max}$	$Z_a$	$I_{max}$	$R_{aa}$	UL	$k_{n.n}$	$R_o$	$L_a$
40 W	8000 $\Omega$	200 mA	173 $\Omega$	43 %	47.7:1, 31.6:1	4 and 8 $\Omega$	44 H
$f_{min}$	$f_{max}$	Core	Size W	Size H	Size L	Weight	Count
15Hz @ -3dB	68kHz @ -3dB	EI84/42	W1 - 70 mm W2 - 84 mm W3 - 110 mm	H1 - 70 mm H2 - 74 mm	L1 - 42 mm L2 - 60 mm L3 - 72 mm L4 - 82 mm	1.8 kG	1
Price							
1-5 units		5+ units		10+ units		25+ units	
125.0 USD		119.0 USD		113.0 USD		106.0 USD	