


LO PP80-3

The transformer is made on the annealed cores, thickness of laminations 0.3 mm .



Caption

weight	approximate weight	sizes	overall dimensions
P_{max}	maximum power	f_{min}	minimum frequency
UL	peel off the ultra-linear	R_{aa}	resistance of the anode-anode
L_{aa}	inductance of the anode-anode, $f=120\text{Hz}$	Z_{aa}	anode-anode impedance
$k_{n:n}$	transmission	price	price
core	core type	R_o	load resistance
f_{max}	maximum frequency	I_{max}	maximum current

Specyfikacje

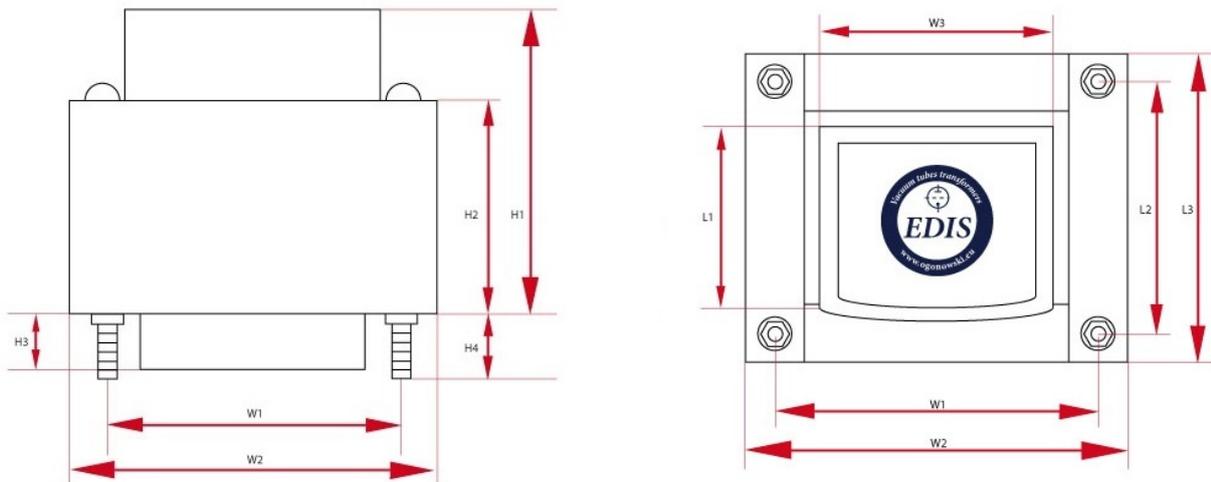

Push Pull - PP80-3 - wersja z jednym dekielkiem (PL)							
P_{max}	Z_a	I_{max}	R_{aa}	UL	$k_{n:n}$	R_o	L_a
80 W	1200 Ω	500 mA	47 Ω	-	17 : 1, 12 : 1	4 and 8 Ω	21 H
f_{min}	f_{max}	Core	Size W	Size H	Size L	Weight	Count
8Hz @ -3dB 15Hz @ +/-1dB	66kHz @ -3dB 47kHz @ +/-1dB	EI96/59	W1 -- mm W2 -- mm W3 -- mm	H1 -- mm H2 -- mm	L1 -- mm L2 -- mm L3 -- mm L4 -- mm	3,5 kG	1
Price							
1-5 units		5+ units		10+ units		25+ units	
149.0 USD		149.0 USD		134.0 USD		127.0 USD	

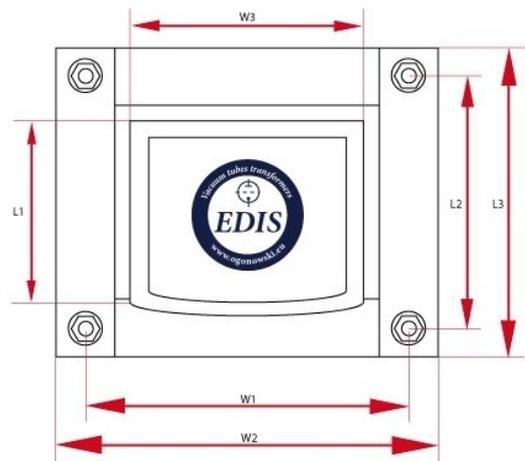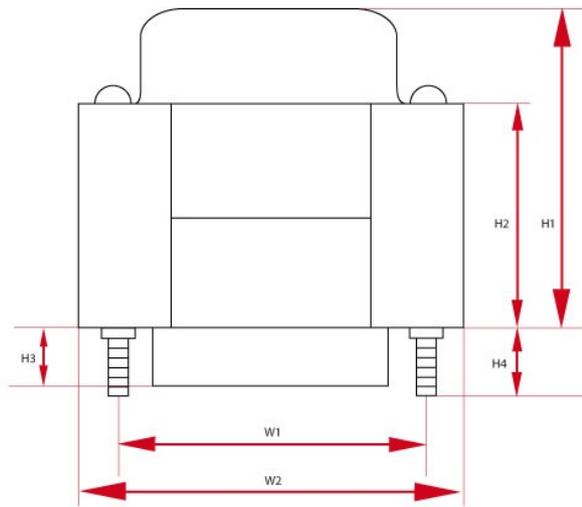

Push Pull - PP80-3 - wersja z jednym dekielkiem (DE)

P_{max}	Z_a	I_{max}	R_{aa}	UL	$k_{n:n}$	R_o	L_a
80 W	1200 Ω	500 mA	47 Ω	-	17 : 1, 12 : 1	4 and 8 Ω	21 H
f_{min}	f_{max}	Core	Size W	Size H	Size L	Weight	Count
8Hz @ -3dB 15Hz @ +/-1dB	66kHz @ -3dB 47kHz @ +/-1dB	E196/59	W1 -- mm W2 -- mm W3 -- mm	H1 -- mm H2 -- mm	L1 -- mm L2 -- mm L3 -- mm L4 -- mm	3,5 KG	1
Price							
1-5 units		5+ units		10+ units		25+ units	
149.0 USD		149.0 USD		134.0 USD		127.0 USD	