


## 300B SE

Idel chance to set-based SE amplifier 300B with stabilized lamp filament, and the rectifier tube (eg 5u4gb).

## Caption

core	core type	$L_a$	anode inductance, $f = 120\text{Hz}$
$I_{\max}$	maximum current	weight	approximate weight
UL	peel off the ultra-linear	$f_{\text{zas}}$	operating frequency
$Z_a$	Anode impedance	$k_{n,n}$	transmission
$f_{\max}$	maximum frequency	sizes	overall dimensions
sizes	overall dimensions	core	core type
$P_{\max}$	maximum power	$U_{\text{we}}$	input voltage
$I_{\max}$	maximum current	$P_{\max}$	maximum power
weight	approximate weight	$f_{\min}$	minimum frequency
sizes	overall dimensions	price	price
core	core type	weight	approximate weight
$R_a$	anode resistance	price	price
L	inductance, $f = 120\text{Hz}$	price	price
$U_{n/I_n}$	output voltage for current	$R_o$	load resistance
R	resistance		

## Specyfikacje

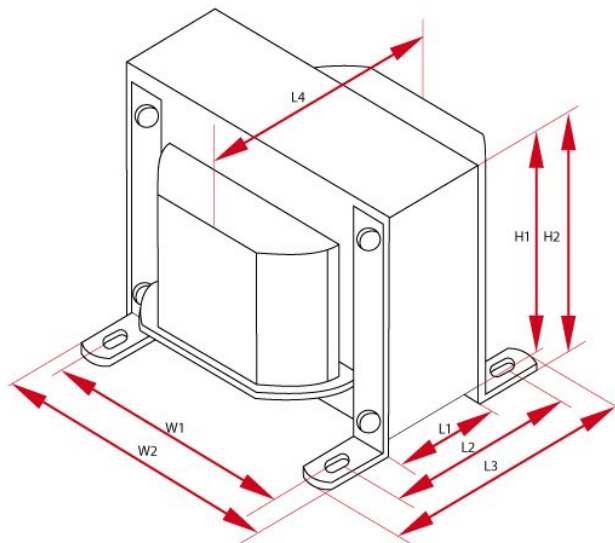

### Choke - D8-1

L	R	$I_{\max}$	Core	Size W	Size H	Size L	Weight	Count
8 H	80 $\Omega$	0.15mA mA	EI66/32	W1 - 90 mm W2 - 90 mm W3 - 110 mm	H1 - 90 mm H2 - 90 mm	L1 - 90 mm L2 - 90 mm L3 - 90 mm L4 - - mm	1.2 kG	2

