


LO SE100-1

Ideal for amplifiers on GM70 tubes and 845 or 211. The transformer is made on the annealed cores, thickness of laminations 0.3 mm . Fits to the transformer, cover OT-14 (dimensions 14x14x14cm - accessories section).


Caption

$k_{n:n}$	transmission	core	core type
R_a	anode resistance	weight	approximate weight
I_{max}	maximum current	P_{max}	maximum power
Z_a	Anode impedance	UL	peel off the ultra-linear
R_o	load resistance	L_a	anode inductance, $f = 120\text{Hz}$
f_{max}	maximum frequency	sizes	overall dimensions
price	price	f_{min}	minimum frequency

Specyfikacje

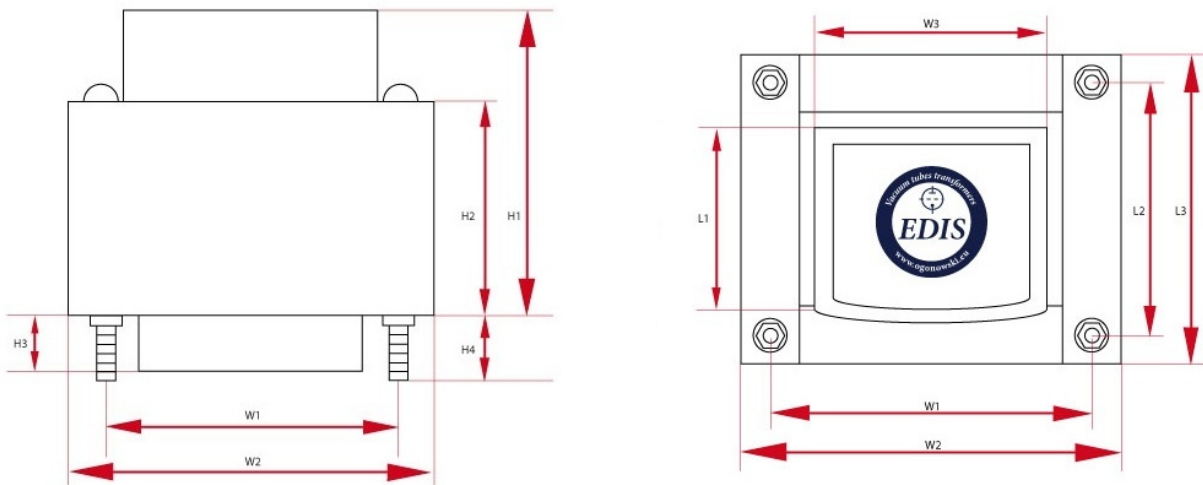

Single Ended - LO SE100-1 - wersja z jednym dekielkiem (PL)							
P_{max}	Z_a	I_{max}	R_a	UL	$k_{n:n}$	R_o	L_a
100 W	7000 Ω	200 mA	170 Ω	-	29,6:1	8 Ω	30 H
f_{min}	f_{max}	Core	Size W	Size H	Size L	Weight	Count
15Hz @ -3dB 20Hz @ +/-1dB	65kHz @ -3dB 40kHz @ +/-1dB	EI120/73pl	W1 -- mm W2 -- mm W3 -- mm	H1 -- mm H2 -- mm	L1 -- mm L2 -- mm L3 -- mm L4 -- mm	7 kG	1
Price							
1-5 units		5+ units		10+ units		25+ units	
260.0 USD		248.0 USD		234.0 USD		221.0 USD	

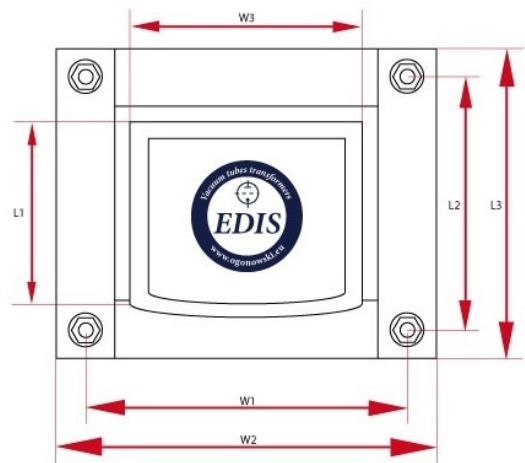

Single Ended - LO SE100-1 - wersja z jednym dekielkiem (DE)

P_{max}	Z_a	I_{max}	R_a	UL	$k_{n:n}$	R_o	L_a
100 W	7000 Ω	200 mA	170 Ω	-	29,6:1	8 Ω	30 H
f_{min}	f_{max}	Core	Size W	Size H	Size L	Weight	Count
15Hz @ -3dB 20Hz @ +/-1dB	65kHz @ -3dB 40kHz @ +/-1dB	EI120/73de	W1 -- mm W2 -- mm W3 -- mm	H1 -- mm H2 -- mm	L1 -- mm L2 -- mm L3 -- mm L4 -- mm	7 kg	1
Price							
1-5 units		5+ units		10+ units		25+ units	
260.0 USD		248.0 USD		234.0 USD		221.0 USD	