


LO SE25-3

The transformer is made on the annealed cores , thickness of laminations 0.23 mm . Fits to the transformer, cover OT-12,5 (12,5x12,5x12,5cm accessories section). Ideal for amplifiers on 300B tubes and EL34.

Caption

$k_{n:n}$	transmission	L_a	anode inductance, $f = 120\text{Hz}$
sizes	overall dimensions	Z_a	Anode impedance
R_a	anode resistance	R_o	load resistance
f_{max}	maximum frequency	core	core type
price	price	f_{min}	minimum frequency
weight	approximate weight	P_{max}	maximum power
I_{max}	maximum current	UL	peel off the ultra-linear

Specyfikacje

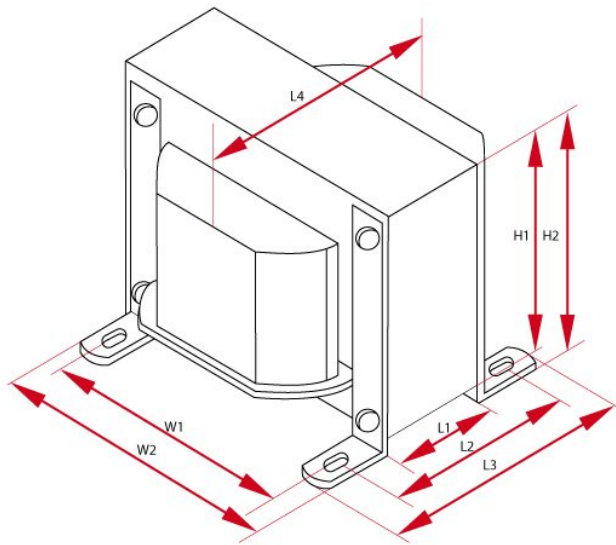

Single Ended - LO SE25-3							
P_{max}	Z_a	I_{max}	R_a	UL	$k_{n:n}$	R_o	L_a
25 W	3000 Ω	200 mA	155 Ω	43 %	27:1, 19:1	4 i 8 Ω	30 H
f_{min}	f_{max}	Core	Size W	Size H	Size L	Weight	Count
10Hz @ -3dB 20Hz @ +/-1dB	60kHz @ -3dB 20kHz @ +/-1dB	CC	W1 - 90 mm W2 - 118 mm W3 - - mm	H1 - 104 mm H2 - 118 mm	L1 - 40 mm L2 - 75 mm L3 - 93 mm L4 - 88 mm	3.5 kG	1
Price							
1-5 units		5+ units		10+ units		25+ units	
199.0 USD		189.0 USD		179.0 USD		169.0 USD	