


## LO SE25-5

The transformer is made on the annealed cores, thickness of laminations 0.3 mm . ideally suited to build a SE amp on 300B tubes, EL34 and KT88.


## Caption

$k_{n,n}$	transmission	core	core type
weight	approximate weight	price	price
$f_{max}$	maximum frequency	sizes	overall dimensions
$R_o$	load resistance	$L_a$	anode inductance, $f = 120\text{Hz}$
$I_{max}$	maximum current	$f_{min}$	minimum frequency
UL	peel off the ultra-linear	$P_{max}$	maximum power
$Z_a$	Anode impedance	$R_a$	anode resistance

## Specyfikacje

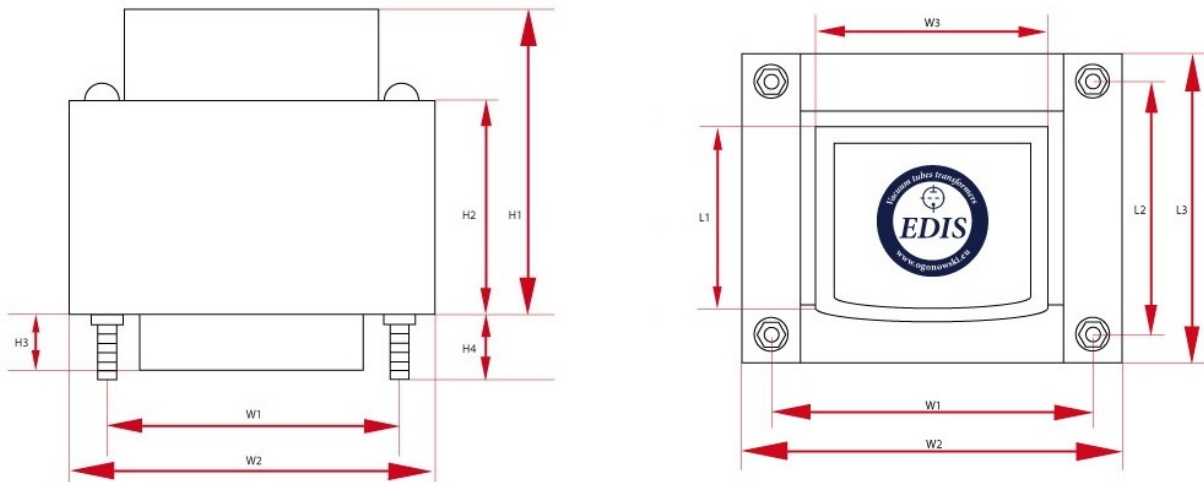

Single Ended - LO SE25-5 - wersja z jednym dekielkiem (PL)							
$P_{max}$	$Z_a$	$I_{max}$	$R_a$	UL	$k_{n,n}$	$R_o$	$L_a$
25 W	2500 $\Omega$	200 mA	140 $\Omega$	-	17,6 : 1	8 $\Omega$	15 H
$f_{min}$	$f_{max}$	Core	Size W	Size H	Size L	Weight	Count
15Hz @ -3dB 25Hz @ +/-1dB	55kHz @ -3dB 18kHz @ +/-1dB	El84/42pl	W1 - 110 mm W2 - 110 mm W3 - 110 mm	H1 - 110 mm H2 - 110 mm	L1 - 110 mm L2 - 110 mm L3 - 110 mm L4 - 110 mm	1.85 kG	1
Price							
1-5 units		5+ units		10+ units		25+ units	
109.0 USD		104.0 USD		98.0 USD		93.0 USD	

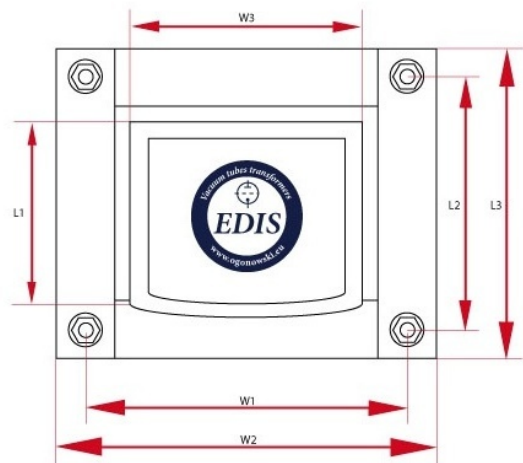

Single Ended - LO SE25-5 - wersja z jednym dekielkiem (DE)

$P_{max}$	$Z_a$	$I_{max}$	$R_a$	UL	$k_{n:n}$	$R_o$	$L_a$
25 W	2500 $\Omega$	200 mA	140 $\Omega$	-	17,6 : 1	8 $\Omega$	15 H
$f_{min}$	$f_{max}$	Core	Size W	Size H	Size L	Weight	Count
15Hz @ -3dB 25Hz @ +/-1dB	55kHz @ -3dB 18kHz @ +/-1dB	EI84/42de	W1 - 110 mm W2 - 110 mm W3 - 110 mm	H1 - 110 mm H2 - 110 mm	L1 - 110 mm L2 - 110 mm L3 - 110 mm L4 - 110 mm	1.85 kG	1
Price							
1-5 units		5+ units		10+ units		25+ units	
109.0 USD		104.0 USD		98.0 USD		93.0 USD	