


LO SE50-1

The transformer is made on the annealed cores , thickness of laminations 0.23 mm . Fits to the transformer cover OT-12,5 (12,5x12,5x12cm accessories section). Transformer wound on a core CC, ideal for the construction of the amplifier to the wonderful both sonically and visually lamp 6C33C-b.

Caption

f_{\min}	minimum frequency	R_o	load resistance
f_{\max}	maximum frequency	Z_a	Anode impedance
R_a	anode resistance	UL	peel off the ultra-linear
L_a	anode inductance, $f = 120\text{Hz}$	core	core type
price	price	P_{\max}	maximum power
weight	approximate weight	sizes	overall dimensions
I_{\max}	maximum current	$k_{n:n}$	transmission

Specyfikacje

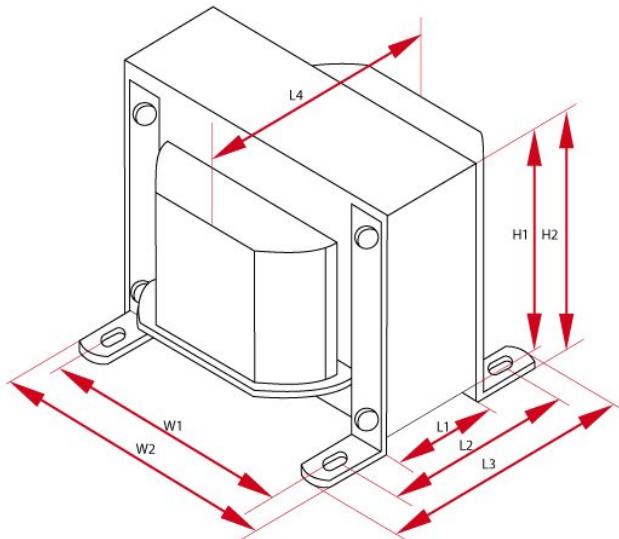

Single Ended - LO SE50-1

P_{\max}	Z_a	I_{\max}	R_a	UL	$k_{n:n}$	R_o	L_a	
50 W	600 Ω	500 mA	42 Ω	-	12:1 , 8:1	4 and 8 Ω	9 H	
f_{\min}	f_{\max}	Core	Size W	Size H	Size L	Weight	Count	
10Hz @ -3dB 20Hz @ +/-1dB		60kHz @ -3dB 20kHz @ +/-1dB	CC	W1 - 90 mm W2 - 118 mm W3 - - mm	H1 - 104 mm H2 - 118 mm	L1 - 40 mm L2 - 75 mm L3 - 93 mm L4 - 88 mm	3.5 kG	1
Price								
1-5 units		5+ units		10+ units		25+ units		
175.0 USD		166.0 USD		158.0 USD		149.0 USD		