


LO SE50-3

The transformer is made on the annealed cores, thickness of laminations 0.3 mm . ideal for amplifier 300B, EL34, KT88.

Caption

|           |                   |           |                                      |
|-----------|-------------------|-----------|--------------------------------------|
| $R_o$     | load resistance   | sizes     | overall dimensions                   |
| price     | price             | core      | core type                            |
| $f_{min}$ | minimum frequency | $L_a$     | anode inductance, $f = 120\text{Hz}$ |
| $Z_a$     | Anode impedance   | weight    | approximate weight                   |
| $R_a$     | anode resistance  | $k_{n:n}$ | transmission                         |
| $f_{max}$ | maximum frequency | $P_{max}$ | maximum power                        |
| $I_{max}$ | maximum current   | UL        | peel off the ultra-linear            |

Specyfikacje

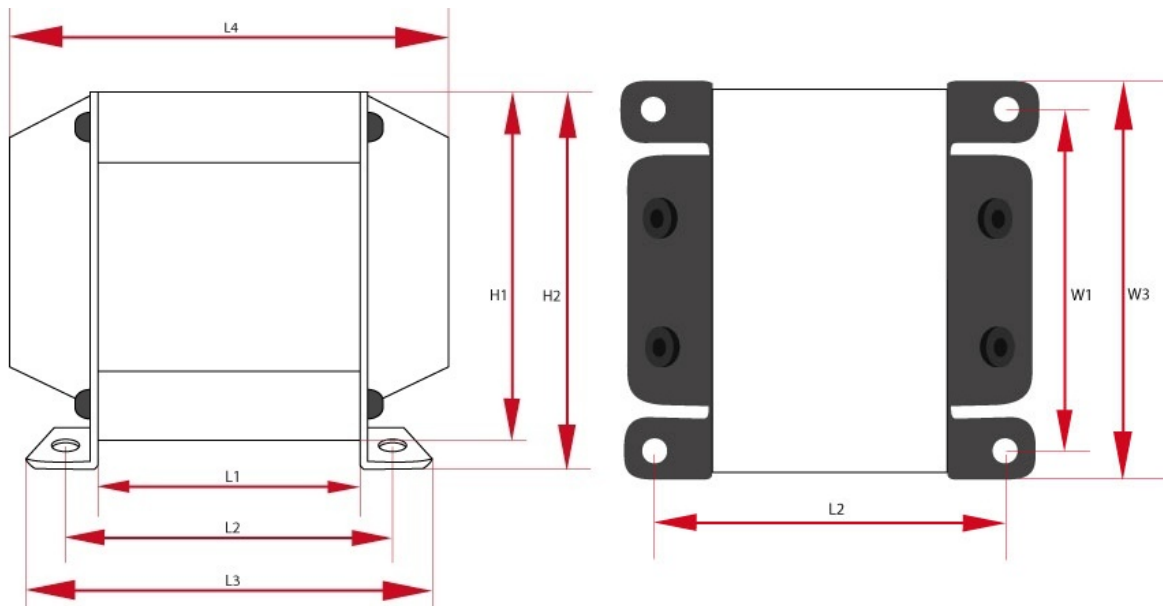

| Single Ended - LO SE50-3 - wersja z dwoma deklami (PL) |                                |           |   |                            |  |                  |       |
|--|--------------------------------|-----------|---|----------------------------|--|------------------|-------|
| $P_{max}$  | $Z_a$                          | $I_{max}$ | $R_a$                                     | UL                         | $k_{n:n}$  | $R_o$            | $L_a$ |
| 50 W   | 2500 $\Omega$                  | 200 mA    | 180 $\Omega$                              | 43 %                       | 25:1 , 17.6:1  | 4 and 8 $\Omega$ | 20 H  |
| $f_{min}$  | $f_{max}$                      | Core      | Size W                                    | Size H                     | Size L   | Weight           | Count |
| 10Hz @ -3dB<br>20Hz @ +/-1dB                           | 60kHz @ -3dB<br>20kHz @ +/-1dB | EI96/59pl | W1 - 110 mm<br>W2 - 110 mm<br>W3 - 110 mm | H1 - 110 mm<br>H2 - 110 mm | L1 - 110 mm<br>L2 - 110 mm<br>L3 - 110 mm<br>L4 - 110 mm | 3.5 kg           | 1     |
| Price  |                                |           |   |                            |  |                  |       |
| 1-5 units  |                                | 5+ units  |   | 10+ units                  |  | 25+ units        |       |
| 149.0 USD  |                                | 142.0 USD |   | 134.0 USD                  |  | 127.0 USD        |       |



Single Ended - LO SE50-3 - wersja z dwoma deklami (DE)

| $P_{max}$                    | $Z_a$                          | $I_{max}$ | $R_a$                                     | UL                         | $k_{n:n}$  | $R_o$            | $L_a$ |
|------------------------------|--------------------------------|-----------|---|----------------------------|--|------------------|-------|
| 50 W                         | 2500 $\Omega$                  | 200 mA    | 180 $\Omega$                              | 43 %                       | 25:1 , 17.6:1  | 4 and 8 $\Omega$ | 20 H  |
| $f_{min}$                    | $f_{max}$                      | Core      | Size W                                    | Size H                     | Size L   | Weight           | Count |
| 10Hz @ -3dB<br>20Hz @ +/-1dB | 60kHz @ -3dB<br>20kHz @ +/-1dB | EI96/59de | W1 - 110 mm<br>W2 - 110 mm<br>W3 - 110 mm | H1 - 110 mm<br>H2 - 110 mm | L1 - 110 mm<br>L2 - 110 mm<br>L3 - 110 mm<br>L4 - 110 mm | 3.5 kg           | 1     |
| Price                        |                                |           |   |                            |  |                  |       |
| 1-5 units                    |                                | 5+ units  |   | 10+ units                  |  | 25+ units        |       |
| 149.0 USD                    |                                | 142.0 USD |   | 134.0 USD                  |  | 127.0 USD        |       |